


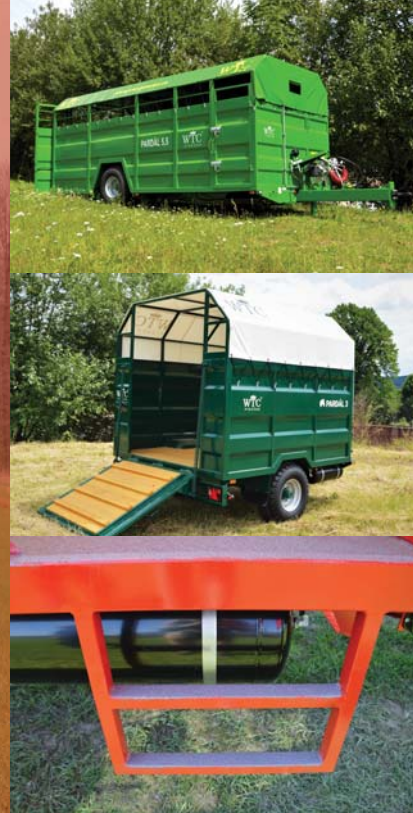

PARDÁL tractor animal carriers

PARDÁL tractor animal carriers

PARDÁL tractor animal carriers are characterized particularly by their robust structure, perfect manufacturing and amply dimensioned high-quality components. PARDÁL carriers are only manufactured in an all-metal design and designed in such a way to withstand without problems even the most demanding operations in livestock production.

PARDÁL carriers with single axle

Technical parameters	PARDÁL 3	PARDÁL 3,7	PARDÁL 5,5	PARDÁL 5,5 KLEK
Number of axles (pcs)	1	1	1	1
Livestock capacity (pcs)	1 - 2	4 - 6	8 - 10	8
Maximum total allowable weight (kg)	7 000	7 000	7 000	7 000
Loading area length (mm)	3 040	3 700	5 500	5 500
Loading area width (mm)	2 160	2 340	2 340	2 340
Transport space height (mm)	2 130	2 130	2 130	2 130
Total length (mm)	4 860	5 730	7 500	7 500
Total width (mm)	2 320	2 500	2 500	2 500
Speed limit (km/hour)	40	40	40	40

PARDÁL carriers with two axles

Technical parameters	PARDÁL 7,5	PARDÁL 7,5 KLEK	PARDÁL 9
Number of axles (pcs)	2	2	2
Livestock capacity (pcs)	12 - 14	10	14 - 16
Maximum total allowable weight (kg)	12 000	12 000	14 000
Loading area length (mm)	7 500	7 500	9 000
Loading area width (mm)	2 340	2 340	2 340
Transport space height (mm)	2 130	2 130	2 130
Total length (mm)	9 540	9 540	11 000
Total width (mm)	2 500	2 500	2 500
Speed limit (km/hour)	40	40	40

